

EN 29053 - Determination of airflow resistance

Direct airflow method - method A


Client: Kvadrat

Date: 02-03-20

Type: Plecto 50% new wool
Colour: 734 16% nylon
Order: 34% polyester
Batch:
Manufacturer: Febrik

Specimen Diameter: 100 mm
Thickness: 1.44 mm
Area specific mass: 523 g/m²

u_l (mm/s)	$R_{s,l}$ (Pa s/m)
16.53	69
14.16	72
11.80	74
9.44	77
7.12	78
4.80	78

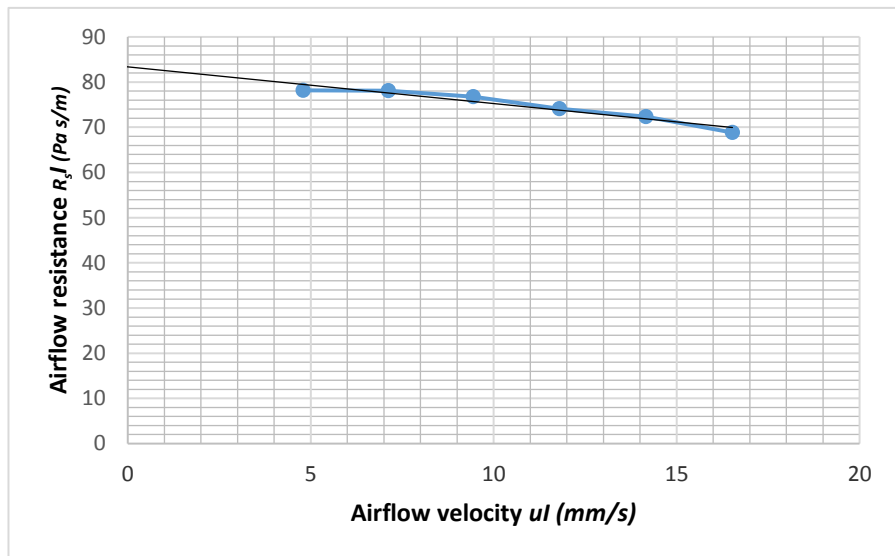

Airflow Resistance

$R_s = 83$ Pa s/m